

Type No. 1N198B

T-03-07

**GOLD BONDED GERMANIUM DIODE**

6 Lake Street  
PO Box 1436  
Lawrence, MA 01841

Telephone (617) 681-0392  
TeleFax (617) 681-9135  
Telex 928377



BKC International  
Electronics Inc.

**FEATURES**

Low forward voltage drop—low power consumption

Thirty years of proven reliability—one million hours mean time between failures (MTBF)

Very low noise level

Metallurgically bonded

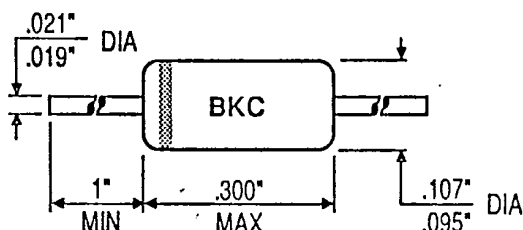
**ABSOLUTE MAXIMUM RATINGS** (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	100 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

**ELECTRICAL CHARACTERISTICS**

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	100		V	25 °C
Reverse Current	I <sub>r</sub>	50 V		50	μA	25 °C
Reverse Current	I <sub>r</sub>	50 V		250	μA	75 °C
Forward Voltage	V <sub>f</sub>	4 mA		1	V	25 °C
Reverse Recovery	T <sub>rr</sub>	See Note		300	n Sec	

Note: I<sub>f</sub> = 2, V<sub>r</sub> = -6, Recover to 50 k.

**MECHANICAL**

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.